

## HS-882TAB SERIES

**Plate Materials:** POM-DP,POM-LF

**Pin Material:** Cold rolled austenitic stainless steel





Materials



Sprockets



Applications

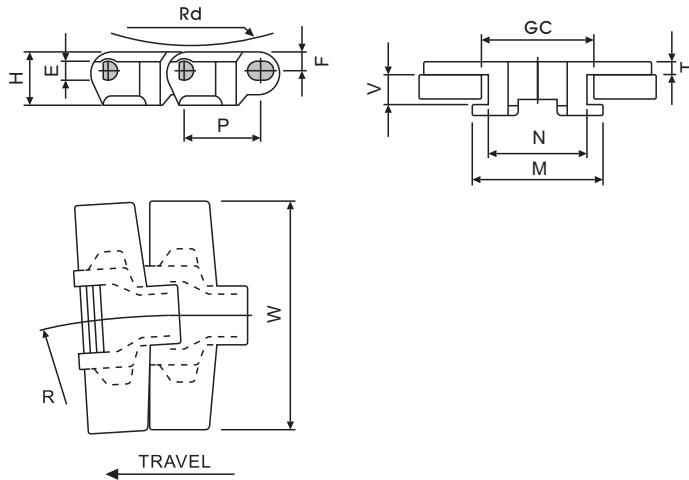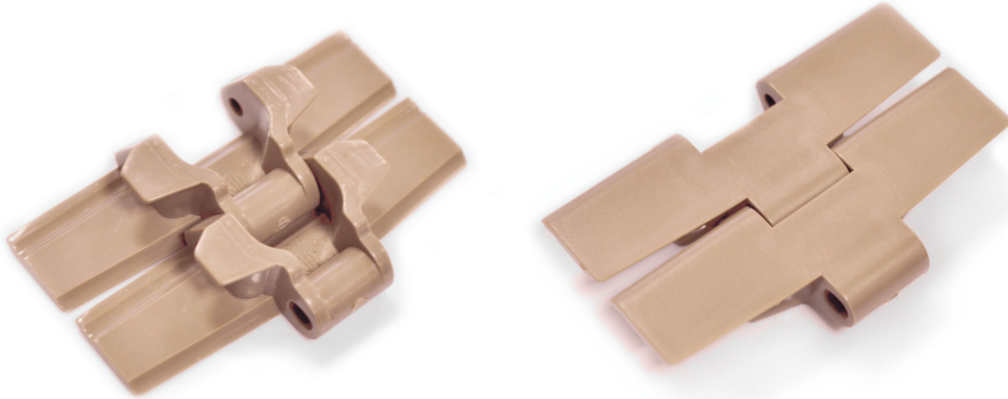

Dimension	mm	inches
P	38.1	1.500
R	610.0	24.016
W	—	—
H	27.0	1.063
T	4.8	0.189
E	8.7	0.343
M	76.2	3.000
F	9.5	0.374
N	57.2	2.252
V	17.0	0.669
RD	40.0	1.574
GC(Straight)	60.0	2.362
GC(Curve)	58.0	2.283

### HS-882TAB (Side Flexing Plastic Chain)

#### CHARACTERISTICS

	Width W (mm)	(inch)	Working Load N(21°C)	lbs(21°C)	Radius (mm)	(inch)	Reverse Radius (mm)	(inch)	Weight (kg/m)
HS-882TAB-K450	114.3	4.50	3830	860	609.6	24.00	40	1.57	2.05
HS-882TAB-K600	152.4	6.00	3830	860	609.6	24.00	40	1.57	2.10
HS-882TAB-K750	190.5	7.50	3830	860	609.6	24.00	40	1.57	2.47
HS-882TAB-K1000	254.0	10.00	3830	860	609.6	24.00	40	1.57	2.87
HS-882TAB-K1200	304.8	12.00	3830	860	609.6	24.00	40	1.57	3.41