

HS-880-EL SERIES

Plate Materials: POM-DP,POM-LF
Pin Material: Cold rolled austenitic stainless steel






Materials



Sprockets



Applications

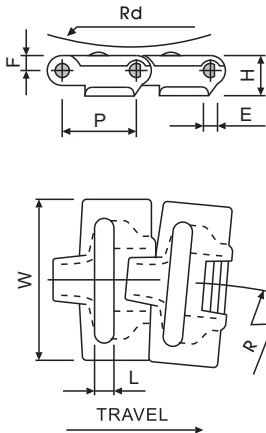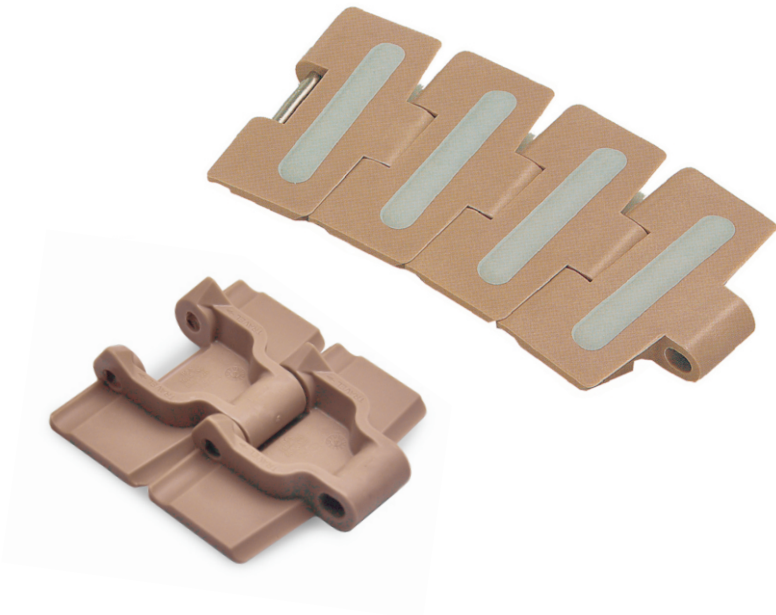

Dimension	mm	inches
P	38.1	1.500
W	-	-
E	7.1	0.280
T	4.0	0.157
F	7.6	0.300
N	61.1	2.406
M	42.9	1.689
D	2.0	0.079
L	10.0	0.394
H	20.0	0.787
R	400.0	1.575
S	11.5	0.453
V	16.0	0.630
RD	40.0	1.575
GC(Straight)	46.0	1.811
GC(Curve)	44.2	1.740

B:65. 0/95. 0

HS-880-EL(Side Flexing Plastic Chain)

CHARACTERISTICS									
	Width W		Working Load		Radius		Reverse Radius		Weight
	(mm)	(inch)	N(21℃)	lbs(21℃)	(mm)	(inch)	(mm)	(inch)	(kg/m)
HS-880-K325-EL	82.5	3.25	2100	472	457	18.00	40	1575	0.94
HS-880-K450-EL	114.3	4.50	2100	472	500	19.69	40	1575	1.08