

HS-880-EL BO SERIES



Materials







Sprockets



Applications

Plate Materials: POM-DP,POM-LF

Pin Material: Cold rolled austenitic stainless steel

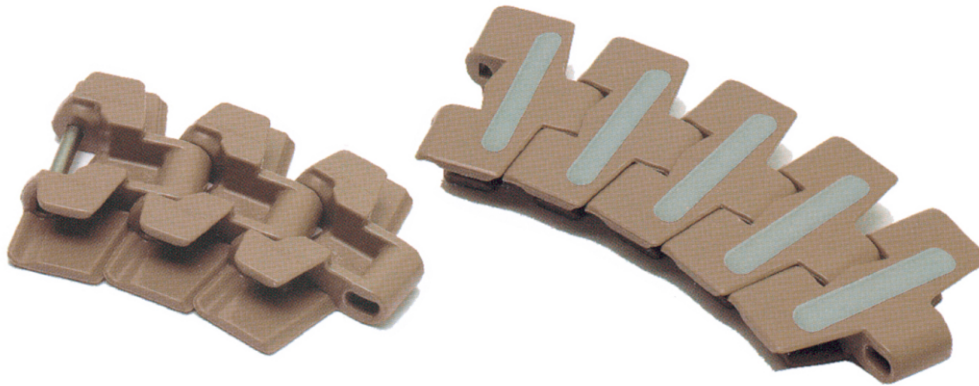

Dimension	mm	inches
P	38.1	1.500
W	-	-
E	7.1	0.280
T	4.0	0.157
F	7.6	0.300
N	61.1	2.406
M	42.9	1.689
D	2.0	0.079
L	10.0	0.394
H	20.0	0.787
R	400.0	1.575
S	11.5	0.453
V	16.0	0.630
B	65.0	2.560
RD	40.0	1.575
GC(Straight)	46.0	1.811
GC(Curve)	44.2	1.740

HS-880-EL BO (Side Flexing Plastic Chain)

CHARACTERISTICS

	Width W (mm)	Width W (inch)	Working Load N(21°C)	Working Load lbs(21°C)	Radius (mm)	Radius (inch)	Reverse Radius (mm)	Reverse Radius (inch)	Weight (kg/m)
HS-880-EL BO-K325	82.5	3.25	1680	378	190	7.48	40	1.575	0.96