

HS-1060A-N TAB SERIES

Plate Materials : POM-DP,POM-LF  
Pin Material : Cold rolled austenitic stainless steel




Materials



Sprockets



Applications

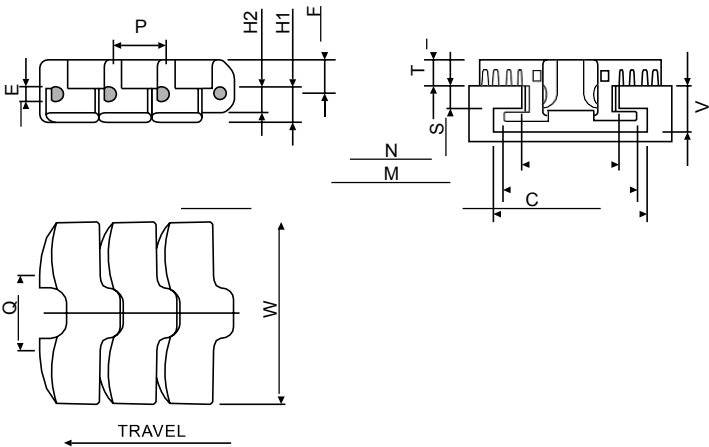

Dimension	mm	inches
P	25.4	1.000
W	83.8	3.300
E	8.6	0.340
T	12.7	0.500
F	12.2	0.480
M	61.5	2.421
N	45.0	1.771
S	10.0	0.394
Q	42.0	1.654
V	20.0	0.787
C	70.0	2.756
H1	16.0	0.630
H2	12.0	0.472

HS-1060A-N TAB (Side Flexing Plastic Chain)

CHARACTERISTICS									
	Width W		Working Load		Radius		Reverse Radius		Weight
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(mm)	(inch)	
HS-1060A-N-TAB	83.8	3.30	1890	425	500	19.69	130	5.12	2.13