

HS-915 SERIES



Materials



Sprockets




Applications

Plate Materials: P

Pin Material: Cold rolled austenitic stainless steel

XP series: brushed hinges for inliners/inclined combiners

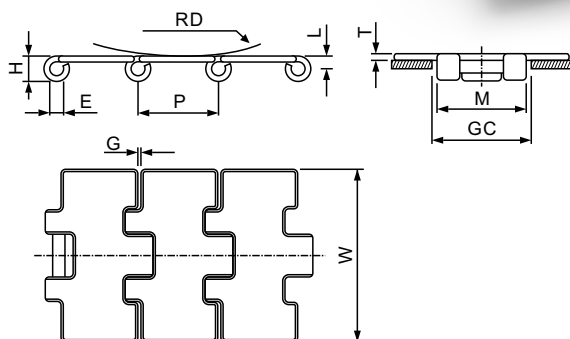

Dimension	mm	inches
P	38.1	1.500
T	3.0	0.118
M	42.0	1.654
L	6.4	0.252
H	13.0	0.512
E	6.4	0.250
G	1.6	0.063
RD	150.0	5.906
GC	44.0	1.732

HS-915 (Straight Running-Single Hinge)

CHARACTERISTICS

	Width W		Working Load		Sideflexing Radius		Weight
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(kg/m)
HS-P 915 K2 1/4	57.1	2.25	8500	1913	-	-	2.00
HS-P 915 K2 1/2	63.5	2.50	8500	1913	-	-	2.14
HS-P 915 K2 5/8	66.7	2.63	8500	1913	-	-	2.21
HS-P 915 K3 1/4	82.6	3.25	8500	1913	-	-	2.57
HS-P 915 K3.8	83.8	3.30	8500	1913	-	-	2.60
HS-P 915 K3 1/2	88.9	3.50	8500	1913	-	-	2.71
HS-P 915 K4	101.6	4.00	8500	1913	-	-	2.99
HS-P 915 K4 1/2	114.3	4.50	8500	1913	-	-	3.28
HS-P 915 K6	152.4	6.00	8500	1913	-	-	4.13
HS-P 915 K7 1/2	190.5	7.50	8500	1913	-	-	4.98
HS-XP 915 K3 1/4	82.6	3.25	8500	1913	-	-	2.57
HS-XP 915 K3.8	83.8	3.30	8500	1913	-	-	2.60

HS-HD 915 (Straight Running-Single Hinge-Increased Pin Hardness)

CHARACTERISTICS

	Width W		Working Load		Sideflexing Radius		Weight
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(kg/m)
HS-PHD 915 K3 1/4	82.6	3.25	8500	1913	-	-	2.57
HS-PHD 915 K3.8	83.8	3.30	8500	1913	-	-	2.60
HS-PHD 915 K4 1/2	114.3	4.50	8500	1913	-	-	3.28
HS-PHD 915 K7 1/2	190.5	7.50	8500	1913	-	-	4.98