

HS-2600FTTAB-O SERIES

Plate Materials: POM-DP, POM-LF
Pin Material: Cold rolled austenitic stainless steel




Materials



Sprockets



Applications

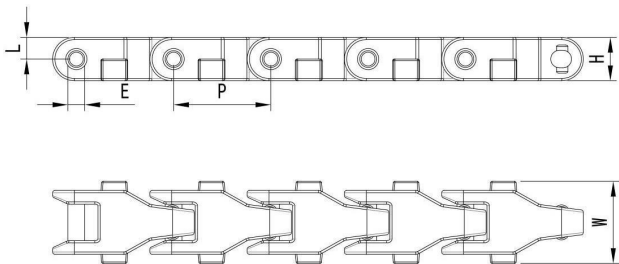

Dimension	mm	inches
P	63.5	2.480
M	23.3	0.917
W	54.0	2.126
H	28.4	1.122
E	11.0	0.433
L	14.3	0.563

HS-2600FTTAB-O (Side Flexing Case Conveyor Chains)

CHARACTERISTICS									
	Width W		Working Load		Radius		Reverse	Radius	Weight
	(mm)	(inch)	N(21℃)	lbs(21℃)	(mm)	(inch)	(mm)	(inch)	(kg/m)
HS-2600FTTAB-O	54.0	5.51	2100	472	200	7.87	40	1.57	1.40